



Regional

KRS03(+)



- Wide and deep tread enhances cost per mile performance and driving stability in highway service
- Newly applied edge overlap on the end of working belts improves casing durability

Depth 17.5" : 2.5mm 19.5",22.5" : 3.0mm
Width 17.5" : 6.0mm 19.5",22.5" : 8.0mm

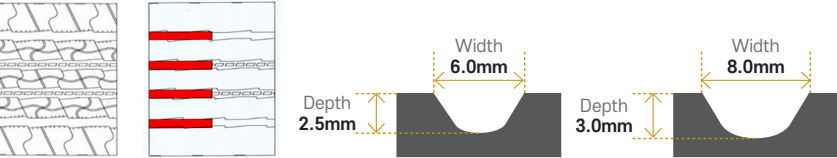


Rim		Tire Size		Ply Rating		Measuring Rim Width		Approved Rim Width			Max. Air Pressure			Max. Load			Section Width			Overall Diameter			Tread Depth			Static Loaded Radius			Rolling Circumference
									bar	psi		kg	lbs		mm	inch		mm	inch		mm	x/32"		mm	inch		mm	RPM	
Tubeless																													
22.5"	315/80 R22.5	S	156(154)	L	20	9.00	9.75	9.00	130	4080	9000	307	12.1	1076	42.4	16.0	20.2	500	19.7	3282	490								
		D	150(150)	(M)							3750	8270																	
	305/70 R22.5	S	152(150)	L	16	9.00	8.25	9.00	130	3350	7390	300	11.8	998	39.3	15.0	18.9	462	18.2	3044	529								
		D	148(148)	(M)							3150	6940																	
	295/80 R22.5	S	152	M	16	9.00	8.25	8.30	120	3550	7830	301	11.9	1052	41.4	15.5	19.5	490	19.3	3209	501								
		D	148								3150	6945																	
	295/60 R22.5	S	150(149)	K	16	9.00	9.75	9.00	130	3350	7390	289	11.4	916	36.1	12.7	16.0	430	16.9	2775	580								
		D	147(146)	(L)							3075	6780																	
	275/70 R22.5	S	148(152)	M	16	8.25	7.50	8.60	125	3150	6945	275	10.8	965	38.0	16.0	20.2	448	17.6	2943	547								
D		145(148)	(J)							2900	6395																		
19.5"	305/70 R19.5	S	148	M	16	9.00	8.25	8.60	125	3150	6945	305	12.0	924	36.4	15.0	18.9	424	16.7	2818	571								
		D	145								2900	6395																	
	285/70 R19.5	S	146	M	16	8.25	7.50	8.60	125	3000	6610	276	10.9	895	35.2	14.0	17.6	413	16.2	2730	589								
		D	144								2800	6175																	
	245/70 R19.5	S	133	M	14	7.50	8.25	7.60	110	2060	4540	242	9.5	848	33.4	14.0	17.6	393	15.5	2586	622								
		D	131								1985	4375																	
	225/70 R19.5	S	128	L	14	6.75	6.00	7.60	110	1800	3970	222	8.7	810	31.9	13.0	16.4	377	14.9	2471	651								
D		126								1700	3750																		
17.5"	9.5 R17.5	S	129	L	12	6.75	6.00	7.80	110	1850	4080	232	9.1	843	33.2	13.0	16.4	392	15.4	2571	626								
		D	127								1750	3860																	
	8.5 R17.5	S	121	M	12	6.00	5.25	6.20	90	1450	3195	208	8.2	804	31.7	12.5	15.7	375	14.8	2452	656								
		D	120								1400	3085																	
	235/75 R17.5	S	132	M	14	6.75	7.50	7.60	110	2000	4410	238	9.4	801	31.5	13.5	17.0	374	14.7	2443	659								
		D	130								1900	4190																	
	205/75 R17.5	S	124	M	10	6.00	5.25	7.60	110	1600	3525	206	8.1	760	29.9	12.5	15.7	323	12.7	2318	694								
D		122								1500	3305																		

KRS03+

KRS55



- High molecular rubber for wear performance, Anti-aging chemical
- High dispersion carbon for interaction with rubber
- More mileage compared to its predecessors

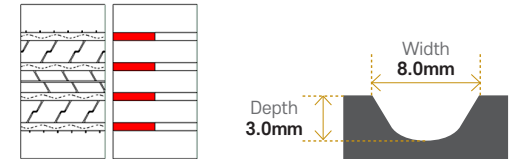


Rim	 Tire Size	 Ply Rating	 Measuring Rim Width	 Approved Rim Width	 Max. Air Pressure		 Max. Load		 Section Width		 Overall Diameter		 Tread Depth		 Static Loaded Radius		 Rolling Circumference				
					bar	psi	kg	lbs	mm	inch	mm	inch	mm	x/32"	mm	inch	mm	RPM			
					Tubeless																
22.5"	295/80 R22.5	S	154	M	18	9.00	8.25	9.00	130	3750	8270	298	11.7	1052	41.4	16.0	20.2	490	19.3	3209	501
		D	149																		

KRS11



- Improvement of driving stability and water drainage with multiple performance pattern
- Enhanced traction performance from Zig-zag shape and groove base bar
- Prevention of shoulder fast wear and uneven wear with wider shoulder rib

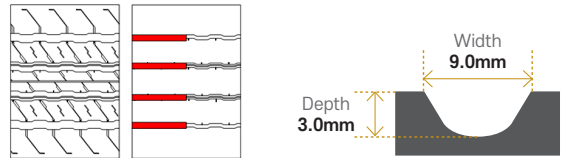

NEW
PRODUCT



Rim	Tire Size																				
					bar	psi	kg	lbs	mm	inch	mm	inch	mm	x/32"	mm	inch	mm	RPM			
Tubeless																					
22.5"	295/80 R22.5	S	152	M	16	9.00	8.25	8.30	120	3550	7830	299	11.8	1049	41.3	15.0	18.9	489	19.2	3199	503
		D	148							3150	6945										
	275/80 R22.5	S	149	L	16	8.25	7.50	8.30	120	3250	7160	286	11.3	1023	40.3	15.5	19.5	478	18.8	3120	516
		D	146								3000	6610									